


Opti-Core® LC Uniboot Pull-Boot Duplex Fiber Optic Patch Cords

technical information

The Opti-Core® Pull-Boot LC Duplex Fiber Optic Patch Cords meet the high performance essential for today's high speed systems with a connector that allows easy polarity change in the field without any mechanical components that can be unfastened or misplaced. In addition, the 2.0mm, 2-fiber round unitary cable construction reduces cable volume by 50% making the patch cords ideal for reducing cable congestion in extremely high density patch fields. These patch cords are available in plenum (OFNP) or low smoke zero halogen (LSZH) rated jacket materials along with OM4, OM4+, OM5, and OS2 fiber types. The connectors are available in UPC (multimode and singlemode) and APC (singlemode only) end faces.

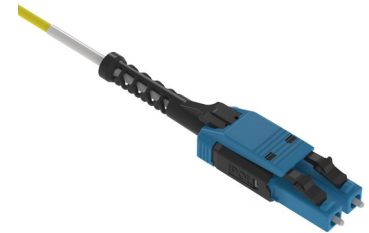

application

Provide interconnect and cross-connect of applications in entrance facilities, telecommunication rooms, data centers, at the desk and network applications to interconnect pre-terminated cassettes in main distribution, horizontal distribution, and equipment distribution areas.

construction

Fiber count:	Duplex (2-fiber) Round
Cable jacket ratings:	Plenum (OFNP) Low Smoke Zero Halogen (LSZH)
Fiber types:	Singlemode: OS2 Multimode: OM4 OM4+ Signature Core™ OM5
Connector types, End 'A':	Duplex LC Uniboot
Connector types, End 'B':	Duplex LC Uniboot
Jacket color:	OS2: Yellow OM4: Aqua OM4+ Signature Core™: Aqua OM5: Lime

optical properties

Connector insertion loss (IL):	Optimized: 0.15dB max (OM4, OM4+, OM5) 0.25dB max (OS2) Ultra: 0.10dB max (OM4, OM4+, OM5)
Connector return loss (RL):	26dB min (Multimode fiber) 55dB min (Singlemode fiber) 65dB min (Singlemode fiber/APC)

physical properties

Cable outside diameter (OD):	2.0mm
Connector cable retention:	50 N @ 0°C 19.4 N @ 90°C
Connector durability:	500 cycles
Bend Radius Min:	20mm

environmental properties

Storage and shipping temperature:	-40°C to 70°C
Operating and installation temperature:	-10°C to 60°C

standards

Meets or exceeds:	IEC 60332-1-2, IEC 60332-3-24, IEC 60754-1, IEC 60754-2, IEC 61034-2, TIA-604-3 (FOCIS-3), TIA-604-5 (FOCIS-10), TIA 568.3-D, IEC 60793-2-10 Ed 6, IEC11801-1 Ed 3, OM5 ANSI/TIA-492AAAE
Restriction of Hazardous Substances (RoHS) Compliance:	All patch cord components meet the requirement of Directive 2011/65/EU

OM4+ Signature Core™ and OM5 fibers are 100% standards compliant meeting all OM3 and OM4 specifications. The actual supported reach also depends on the electrical and optical characteristics of the VCSEL transceiver.

OM4+ Signature Core™ provides on average 20% longer reach than OM4 defined standard for all applications using Ethernet, Fibre Channel and Cisco BiDi technologies.

OM5 includes additional bandwidth characterization at 953nm to support extended distances when using SWDM. For more information, visit www.panduit.com/signature-core.

Opti-Core® LC Uniboot Pull-Boot Duplex Fiber Optic Patch Cords

part number configurator

Example: FZ2RLU1U1ONM005 = Fiber, OM4, 2-fiber, 2mm Round, LSZH, LC Uniboot to LC Uniboot, Optimized IL, 5 Meters

Character	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
Example	F	Z	2	R	L	U	1	U	1	O	N	M	0	0	5	
1 – Fiber Product						5 – Jacket Type						10 – Performance/Construction				
F = Fiber						L = LSZH (Low Smoke Zero Halogen)						O = Optimized IL (A-B)				
2 – Fiber Type						P = OFNP (Plenum)						11 – Connector Variant				
Z = OM4						6 – Connector Type						N = No variant				
S = OM4+ Signature Core™						U = LC Duplex Uniboot						12 – Unit of Length				
W = OM5						7 – Connector Variant						M = Meters				
9 = OS2						1 = UPC						13, 14, 15 – Length				
3 – Fiber Count						2 = APC Singlemode						001 - 050				
2 = 2-fiber						8 – Connector Type										
4 – Cable Type						U = LC Duplex Uniboot										
R = Round 2.0mm						9 – Connector Variant										
						1 = UPC										
						2 = APC Singlemode										

changing polarity: lc duplex uniboot fiber optic patch cords

CHANGING POLARITY

WHEN DOTS ON HOUSING ARE MATCHING COLOR THE CONNECTOR INDICATES STRAIGHT THROUGH (A-B)


HOLD THE HOUSING AND PUSH THE BOOT FORWARD TOWARD THE CONNECTOR

ROTATE BOTH CONNECTORS 180°

ROTATE THE CONNECTOR BODY 180°

PUSH THE OUTER HOUSING FORWARD UNTIL IT CLICKS, LOCKING INTO POSITION

POLARITY IS CHANGED INTO PAIR FLIPPED (A-A) WHEN THE DOTS HAVE DIFFERENT COLORS

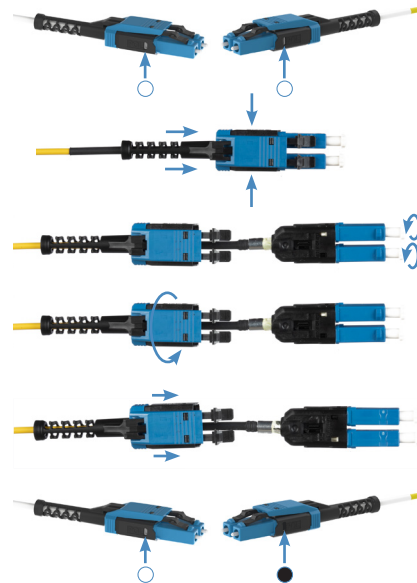

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

© 2021 Panduit Corp.
ALL RIGHTS RESERVED.
FBSP154--WW-ENG
7/2021